Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

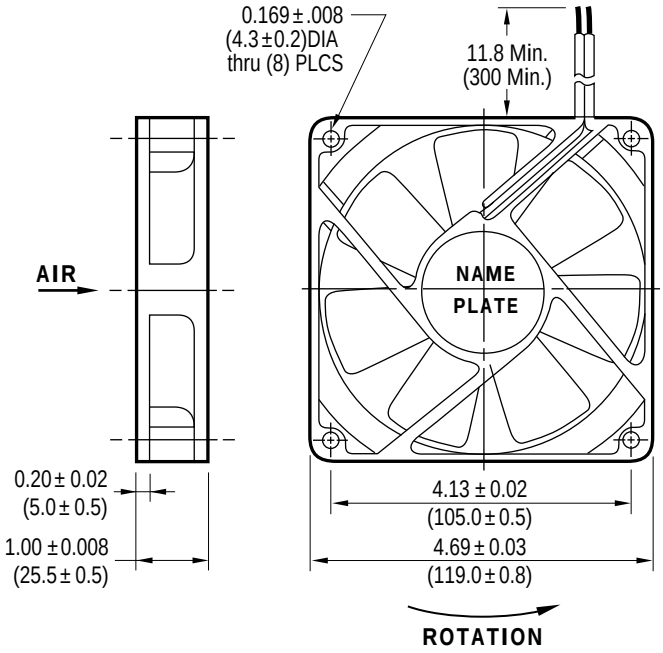

FEATURES:

Size	4.69 in sq. X 1.00 in (119mm sq. X 25mm)
Airflow	50 - 92 CFM
Weight	7.7 oz (220g)
Noise	27 - 41 dBA
Lead Wire	AWG 24, Red/Black, UL1007, CSA TR-64
Terminal	0.110 in
(Optional)	Rib type only (LOO)
Impeller and Venturi	UL94V-0 Reinforced plastic

† Non-stock item, may be subject to lead time

†† Rib-type is a non-stock item, may be subject to lead time

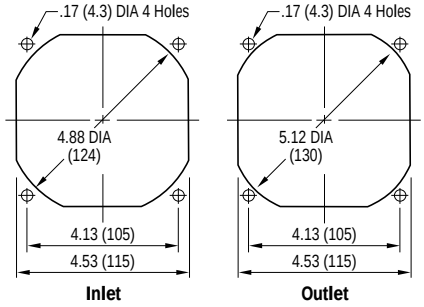

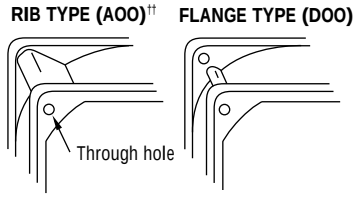

Dimensions are in inches. ( ) are in millimeters

MODEL	VOLTAGE (V)	RANGE (V)	POWER (W)	CURRENT (mA)	SPEED (RPM)	NOISE (dBA)	NOISE NPEL (BELS) 100%	80%	60%	20%	PRESSURE (in H_2O)	AIRFLOW (CFM)
4710NL-04W-B10-D00	12	6 - 13.8	1.44	120	1550	27	4.33	4.20	4.45	4.43	0.08	59
B20-D00†	12	6 - 13.8	1.80	150	1750	30	4.49	4.73	4.68	4.59	0.12	72
B30-D00	12	6 - 13.8	2.88	240	2050	35	4.88	4.62	5.14	5.02	0.14	80
B40-D00†	12	6 - 13.8	4.08	340	2300	38	5.09	5.18	5.31	5.26	0.15	83
B50-D00	12	6 - 13.8	6.84	570	2550	41	5.58	5.56	5.74	5.53	0.19	92

MODEL	VOLTAGE (V)	RANGE (V)	POWER (W)	CURRENT (mA)	SPEED (RPM)	NOISE (dBA)	NOISE NPEL (BELS) 100%	80%	60%	20%	PRESSURE (in H_2O)	AIRFLOW (CFM)
4710NL-05W-B10-D00	24	10 - 27.6	1.44	60	1550	27	4.33	4.20	4.45	4.43	0.08	59
B20-D00†	24	10 - 27.6	2.16	90	1750	30	4.49	4.73	4.68	4.59	0.12	72
B30-D00	24	10 - 27.6	2.88	120	2050	35	4.88	4.62	5.14	5.02	0.14	80
B40-D00†	24	10 - 27.6	4.08	170	2300	38	5.09	5.18	5.31	5.26	0.15	83
B50-D00	24	10 - 27.6	5.76	240	2550	41	5.58	5.56	5.74	5.53	0.19	92